

RI3021


Specification:
 Operating Voltage:220-240V/50Hz
 Built-in electronic ballast
 For PL/G23 lamps
 Light-weight aluminium housing with plastic cover
 Width:65mm
 Height:83mm



Model	Total Wattage	Length(mm)	Qty(pcs/ctn)	Packing Size(cm)	G.W(kg/ctn)
RI3021	11W	410	12	43X28.5X31.5	10

RI3040


Specification:
 Operating Voltage:220-240V/50Hz
 Built-in electronic ballast
 For PL/G23 lamps
 Light-weight aluminium housing with plastic cover
 Width:35mm
 Height:86mm

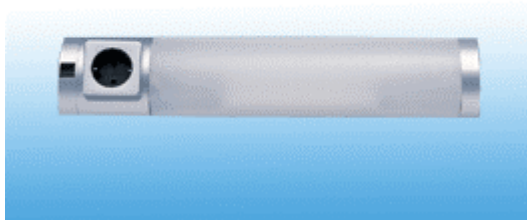

Model	Total Wattage	Length(mm)	Qty(pcs/ctn)	Packing Size(cm)	G.W(kg/ctn)
RI3021	11W	505	12	52.5X41X25	10

RI3014

Specification:
 Operating Voltage:220-240V/50Hz
 Built-in electronic ballast
 For PL/G23 lamps
 Light-weight aluminium housing with plastic cover
 Width:104mm
 Height:42mm

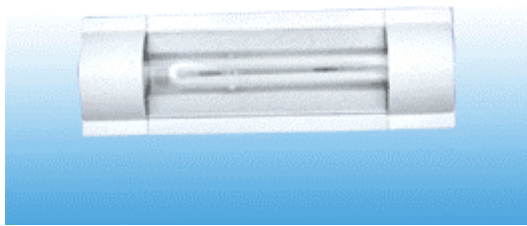

Model	Total Wattage	Length(mm)	Qty(pcs/ctn)	Packing Size(cm)	G.W(kg/ctn)
RI3014	11W	325	20	42X34X25	7.3
RI3014	2X11W	525	20	54X48X25	15.5

RI3015

Specification:

Operatong Voltage:220-240V/50Hz

Built-in electronic ballast

For PL/G23 lamps

Light-weight aluminium housing with plastic cover

Width:104mm

Height:42mm



Model	Total Wattage	Length(mm)	Qty(pcs/ctn)	Packing Size(cm)	G.W(kg/ctn)
RI3015	18W	325	20	45X34X25	10
RI3015	24W	430	20	45X45X25	12
RI3015	36	525	20	54X45X25	15.5

RI3037

Specification:

Operatong Voltage:220-240V/50Hz,110-130V/60Hz

Built-in electronic ballast

For PL/G23 lamps

Light-weight aluminium housing with plastic cover

Width:155mm

Height:70m



Model	Total Wattage	Length(mm)	Qty(pcs/ctn)	Packing Size(cm)	G.W(kg/ctn)
RI3037	35W	325	20	45X34X25	10

RI3002

Specification:

Operatong Voltage:220-240V/50Hz


Built-in electronic ballast

For PL/G23 lamps

Light-weight aluminium housing with plastic cover

Width:80mm


Height:30mm

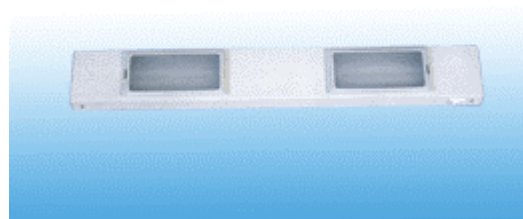

Model	Total Wattage	Length(mm)	Qty(pcs/ctn)	Packing Size(cm)	G.W(kg/ctn)
RI3002	2X9W	550	20	61X40X23	20

RI3001


Specification:
Operating Voltage:220-240V/50Hz
Integral switch,1.5-2.0m power cord with plug
For PL/G23 lamps
Packing:50pcs/CTN(47.5X44X18cm)
G.W.:14KG/CTN
Width:60mm
Height:27mm

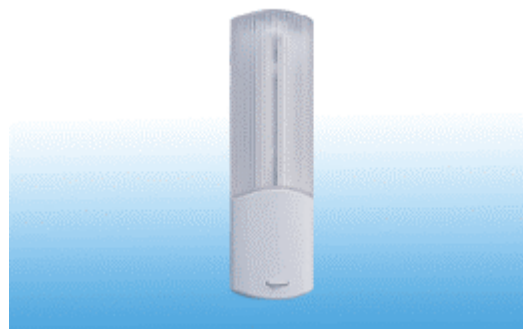**RI3001N**

Specification:
Operating Voltage:220-240V/50Hz
Integral switch,1.5-2.0m power cord with plug
For PL/G23 lamps
Packing:50pcs/CTN(47.5X44X22.5cm)
G.W.:17KG/CTN
Width:60mm
Height:27mm

**RI3024-1X9W**

Specification:
Operating Voltage:220-240V/50Hz
Lamp Specifications:
-Type:1 purchase 9W
-Rated Average lifetime:8000 hours
-Color temperature Options:
Warmwhite:2700K-3200K
Coolwhite:3500K-5000K
Daylight:5000K-6500K
Packing:10pcs/CTN(48.5x24.5x32.5cm)
G.W.:9KG/CTN
Dimmeter:250mm * 50mm

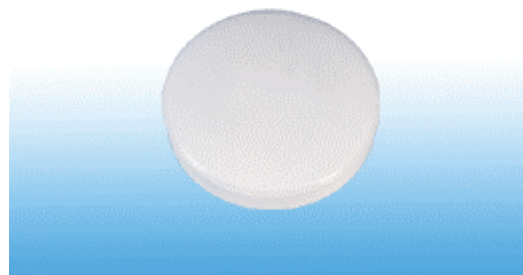

RI3025-2X9W

Specification:

Operatiing Voltage:220-240V/50Hz

Lamp Specifications:

-Type:2 purchase 9W

-Rated Average lifetime:8000 hours

-Color temperature Options:

Warmwhite:2700K-3200K


Coolwhite:3500K-5000K

Daylight:5000K-6500K

Packing:10pcs/CTN(56.5X28.5X35cm)

G.W.:11KG/CTN

Dimmeter:330mm * Height:60mm

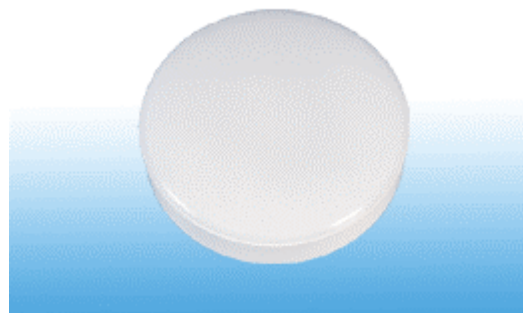**RI3026-1X9W**

Specification:

Operatiing Voltage:220-240V/50Hz

Lamp Specifications:

-Type:1 purchase 9W

-Rated Average lifetime:8000 hours

-Color temperature Options:

Warmwhite:2700K-3200K


Coolwhite:3500K-5000K

Daylight:5000K-6500K

Packing:10pcs/CTN(42.5X21.5X35cm)

G.W.:9KG/CTN

Length:290mm * Width:290mm * Height:80mm

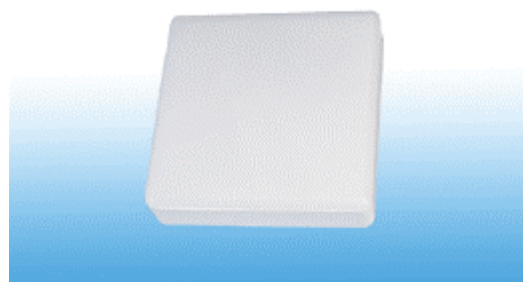**RI3019-2X9W**

Specification:

Operatiing Voltage:220-240V/50Hz

Lamp Specifications:

-Type:2 purchase 9W

-Rated Average lifetime:8000 hours

-Color temperature Options:

Warmwhite:2700K-3200K

Coolwhite:3500K-5000K

Daylight:5000K-6500K

Packing:10pcs/CTN(52.5X27X42.5cm)

G.W.:10KG/CTN

IP Rate:IP44

Dimmeter:290mm * Height:80mm



RI3041-2X9W

Specification:
 Operating Voltage:220-240V/50Hz
 Lamp Specifications:
 -Type:2 purchase 9W
 -Rated Average lifetime:8000 hours
 -Color temperature Options:
 Warmwhite:2700K-3200K
 Coolwhite:3500K-5000K
 Daylight:5000K-6500K
 Packing:10pcs/CTN(50.5X26X48.5cm)
 G.W.:10KG/CTN
 IP Rate:IP44
 Dimmeter:240mm * Height:88mm




RI3051-2X9W

Specification:
 Operating Voltage:220-240V/50Hz
 Lamp Specifications:
 -Type:2 purchase 9W
 -Rated Average lifetime:8000 hours
 -Color temperature Options:
 Warmwhite:2700K-3200K
 Coolwhite:3500K-5000K
 Daylight:5000K-6500K
 Packing:10pcs/CTN(55X28X33cm)
 G.W.:9KG/CTN
 IP Rate:IP54
 Dimmeter:260mm * Height:50mm




RI3052-2X9W

Specification:
 Operating Voltage:220-240V/50Hz
 Lamp Specifications:
 -Type:2 purchase 9W
 -Rated Average lifetime:8000 hours
 -Color temperature Options:
 Warmwhite:2700K-3200K
 Coolwhite:3500K-5000K
 Daylight:5000K-6500K
 Packing:10pcs/CTN(42.5X21.5X30cm)
 G.W.:9KG/CTN
 IP Rate:IP54
 Length:200mm * Width:200mm * Height:55mm

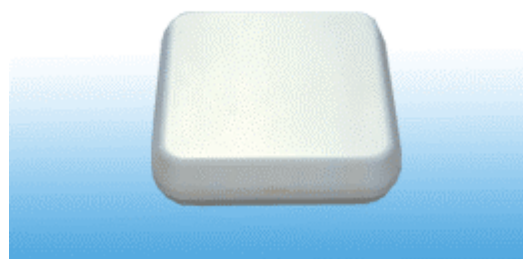

RI3053-1X9W

Specification:
 Operationg Voltage:220-240V/50Hz
 Lamp Specifications:
 -Type:1 purchase 9W
 -Rated Average lifetime:8000 hours
 -Color temperature Options:
 Warmwhite:2700K-3200K
 Coolwhite:3500K-5000K
 Daylight:5000K-6500K
 Packing:10pcs/CTN(23X25.5X32.5cm)
 G.W.:7KG/CTN
 IP Rate:IP54
 Length:215mm * Height:75mm * Width:70mm

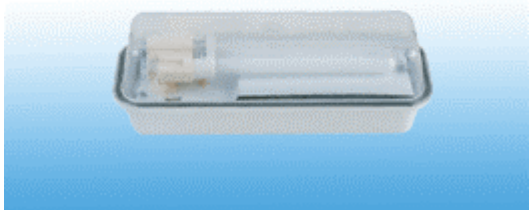

CZ-1/CZ-2

Specification:
 Operationg Voltage:220-240V/50Hz

Model	Total Wattage	Length(mm)	Qty(pcs/ctn)	Packing Size(cm)	G.W(kg/ctn)
CZ-1/CZ-2	8W	215	20	46.5X27.5X35	10