

RI3011

Specification:

Operatiing Voltage:220-240V/50Hz

Built-in electronic ballast

For T8/G13 Flurescent lamps

Light-weight aluminium housing with plastic cover

Width:35mm

Height:65mm



Model	Total Wattage	Length(mm)	Qty(pcs/ctn)	Packing Size(cm)	G.W(kg/ctn)
RI3011	10W	412	20	43X36X20	9.5
RI3011	15W	518	20	53.5X36X20	11.5
RI3011	18W	668	20	68.5X36X20	13.5
RI3011	30W	974	12	99.5X22X20	15
RI3011	36W	1280	12	129.5X22X20	17
RI3011	58W	1579	12	160X22X20	22

RI3012

Specification:

Operatiing Voltage:220-240V/50Hz

Built-in electronic ballast

For T8/G13 Flurescent lamps

Light-weight aluminium housing with plastic cover

Integral switch and power cord

With reflector

Width:34mm/Height:45mm



Model	Total Wattage	Length(mm)	Qty(pcs/ctn)	Packing Size(cm)	G.W(kg/ctn)
RI3012	10W	424	20	41X30X23.5	9
RI3012	15W	528	20	51.5X30X23.5	14
RI3012	18W	681	20	66.5X30X23.5	17
RI3012	30W	1074	12	97.5X22.5X19	15
RI3012	36W	1291	12	128X22.5X19	19
RI3012	58W	1591	12	157.5X22.5X19	22

RI3016

Specification:


Operating Voltage:220-240V/50Hz

Built-in electronic ballast

For T8/G13 Fluorescent lamps

Width:30mm

Height:48mm

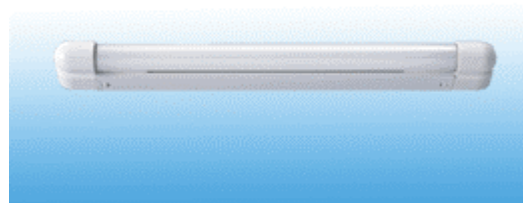

Model	Total Wattage	Length(mm)	Qty(pcs/ctn)	Packing Size(cm)	G.W(kg/ctn)
RI3016	10W	375	30	39X27X28	9
RI3016	15W	480	30	50X27X28	11.5
RI3016	18W	635	30	65.5X27X28	14
RI3016	30W	945	30	95.5X27X28	19
RI3016	36W	1245	20	126X22X23	19.5
RI3016	58W	1500	12	156.5X17X18	21.5

RI3018

Specification:

Operating Voltage:220-240V/50Hz

Built-in electronic ballast

For T8/G13 Fluorescent lamps

Light-weight aluminium housing with plastic cover

Width:53mm

Height:77mm



Model	Total Wattage	Length(mm)	Qty(pcs/ctn)	Packing Size(cm)	G.W(kg/ctn)
RI3018	15W	502	20	52X42X26	16
RI3018	18W	654	20	68.5X42X28	18
RI3018	30W	958	12	97.5X26X26	13
RI3018	36W	1263	12	128X26X26	15

RI3013

Specification:

Operating Voltage:220-240V/50Hz

Built-in electronic ballast

For T8/G13 Fluorescent lamps

Light-weight aluminium housing with plastic cover



Model	Total Wattage	Length(mm)	Qty(pcs/ctn)	Packing Size(cm)	G.W(kg/ctn)
RI3013	10W	378	20	48X40X25	12
RI3013	15W	485	20	50.5X48X25	14.5
RI3013	18W	638	20	66X48X25	17
RI3013	30W	943	12	97.5X36X20.5	15
RI3013	36W	1248	12	127X36X20.5	17.5

RI3013N

Specification:

Operationg Voltage:220-240V/50Hz

Built-in electronic ballast

For T8/G13 Flurescent lamps

Light-weight aluminium housing with plastic cover

Width:42mm

Height:104mm



Model	Total Wattage	Length(mm)	Qty(pcs/ctn)	Packing Size(cm)	G.W(kg/ctn)
RI3013N	10W	378	20	48X40X25	12
RI3013N	15W	485	20	50.5X48X25	14.5
RI3013N	18W	638	20	66X48X25	17
RI3013N	30W	943	12	97.5X36X20.5	15
RI3013N	36W	1248	12	127X36X20.5	17.5

RI3020

Specification:

Operationg Voltage:220-240V/50Hz

Built-in electronic ballast

For T8/G13 Flurescent lamps

Light-weight aluminium housing with plastic cover

Width:65mm

Height:83mm



Model	Total Wattage	Length(mm)	Qty(pcs/ctn)	Packing Size(cm)	G.W(kg/ctn)
RI3020	10W	498	12	53X28X30	9
RI3020	15W	604	12	63X28X30	10.5
RI3020	18W	755	12	78X28X30	14
RI3020	30W	1061	12	109X28X30	18
RI3020	36W	1365	12	139X28X30	20

RI3023

Specification:

Operatong Voltage:220-240V/50Hz

Built-in electronic ballast

For T8/G13 Flurescent lamps

Light-weight aluminium housing with plastic cover

Width:37mm

Height:77mm



Model	Total Wattage	Length(mm)	Qty(pcs/ctn)	Packing Size(cm)	G.W(kg/ctn)
RI3023	10W	375	20	39.5X36X25	12
RI3023	15W	479	20	50X36X25	14.5
RI3023	18W	633	20	66X36X25	18
RI3023	30W	940	12	95.5X27.5X20	12
RI3023	36W	1244	12	126.5X27.5X20	14

RI3028

Specification:

Operatong Voltage:220-240V/50Hz

Built-in electronic ballast

For T8/G13 Flurescent lamps

Light-weight aluminium housing with plastic cover

Width:35mm

Height:55mm



Model	Total Wattage	Length(mm)	Qty(pcs/ctn)	Packing Size(cm)	G.W(kg/ctn)
RI3028	10W	365	20	37.5X26X22.5	12
RI3028	15W	465	20	48X26X22.5	14.5
RI3028	18W	620	20	62.5X26X22.5	18
RI3028	30W	925	12	94X19.5X18	10
RI3028	36W	1235	12	124X19.5X18	15

RI3030

Specification:

Operatong Voltage:220-240V/50Hz


Built-in electronic ballast

For T8/G13 Flurescent lamps

Integral switch and power cord

Width:45mm

Height:86mm

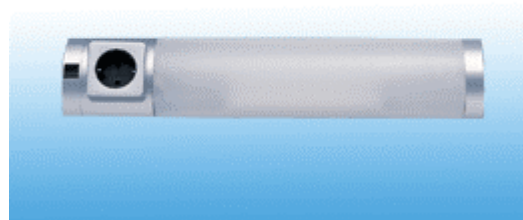

Model	Total Wattage	Length(mm)	Qty(pcs/ctn)	Packing Size(cm)	G.W(kg/ctn)
RI3030	10W	430	20	45X41.5X25	9
RI3030	15W	535	20	56X41X25	12
RI3030	18W	690	20	71X41X25	12.5
RI3030	30W	995	12	102X28.5X21	14
RI3030	36W	1300	12	132X28.5X21	16

RI3031

Specification:

Operationg Voltage:220-240V/50Hz

Built-in electronic ballast

For T8/G13 Flurescent lamps

Integral switch and power cord

Width:56mm

Height:86mm



Model	Total Wattage	Length(mm)	Qty(pcs/ctn)	Packing Size(cm)	G.W(kg/ctn)
RI3031	10W	505	20	52.5X41.5X25	10
RI3031	15W	610	20	63.5X41X25	13
RI3031	18W	765	20	78.5X41X25	13.5
RI3031	30W	1070	12	109.5X28.5X21	15
RI3031	36W	1375	12	139.5X28.5X21	17

RI3049

Specification:

Operationg Voltage:220-240V/50Hz

Built-in electronic ballast

For T8/G13 Flurescent lamps

Light-weight aluminium housing with plastic cover

Width:30mm

Height:125mm



Model	Total Wattage	Length(mm)	Qty(pcs/ctn)	Packing Size(cm)	G.W(kg/ctn)
RI3049	10W	365	20	38X38X23	12
RI3049	15W	468	20	48.5X38X23	14
RI3049	18W	621	20	64X38X23	18
RI3049	30W	927	12	94.5X38X23	15
RI3049	36W	1231	12	125X38X23	17

RI3029

Specification:
 Operating Voltage:220-240V/50Hz
 Built-in electronic ballast
 For T8/G13 Fluorescent lamps
 Integral switch and power cord
 Width:104mm
 Height:42mm



Model	Total Wattage	Length(mm)	Qty(pcs/ctn)	Packing Size(cm)	G.W(kg/ctn)
RI3029	10W	367	20	35X30X22.5	12
RI3029	15W	475	20	49X30X22.5	14.5
RI3029	18W	625	20	64X30X22.5	18
RI3029	30W	935	12	95X30X14	10
RI3029	36W	1235	12	125X30X14	15

RI3036

Specification:
 Operating Voltage:220-240V/50Hz
 Built-in electronic ballast
 For T8/G13 Fluorescent lamps
 Integral switch and power cord
 Width:55mm
 Height:65mm



Model	Total Wattage	Length(mm)	Qty(pcs/ctn)	Packing Size(cm)	G.W(kg/ctn)
RI3036	10W	394	30	41X34.5X30.5	12
RI3036	15W	499	30	52X34.5X30.5	14.5
RI3036	18W	652	30	67X34.5X30.5	18
RI3036	30W	958	20	97.5X28X26	14
RI3036	36W	1262	20	128X28X26	16

RI3032

Specification:
 Operating Voltage:220-240V/50Hz
 Built-in electronic ballast
 For T8/G13 Fluorescent lamps
 Light-weight aluminium housing with plastic cover
 Dimmer:40mm



Model	Total Wattage	Length(mm)	Qty(pcs/ctn)	Packing Size(cm)	G.W(kg/ctn)
RI3032	18W	967	20	98X18X23	13
RI3032	30W	1270	12	129X14X19	10
RI3032	36W	1576	12	160X14X19	15

RI3033

Specification:
 Operating Voltage:220-240V/50Hz
 Built-in electronic ballast
 For T8/G13 Fluorescent lamps
 Light-weight aluminium housing with plastic cover
 Dimmer:40mm



Model	Total Wattage	Length(mm)	Qty(pcs/ctn)	Packing Size(cm)	G.W(kg/ctn)
RI3033	10W	690	20	71X18X22	12
RI3033	15W	755	20	77X18X22	14.5
RI3033	18W	906	20	92X18X22	18

RI3017

Specification:
 Operating Voltage:220-240V/50Hz
 Built-in electronic ballast
 For T8/G13 Fluorescent lamps
 Light-weight aluminium housing with plastic cover
 Width:134mm
 Height:42mm



Model	Total Wattage	Length(mm)	Qty(pcs/ctn)	Packing Size(cm)	G.W(kg/ctn)
RI3017	2X18W	640	12	65.5X43.5X22	16
RI3017	2X30W	950	12	97X43.5X22	19
RI3017	2X36W	1250	12	127X43.5X22	29

RI3017N

Specification:

Operating Voltage:220-240V/50Hz


Built-in electronic ballast

For T8/G13 Fluorescent lamps

Light-weight aluminium housing with plastic cover

Width:134mm

Height:42mm

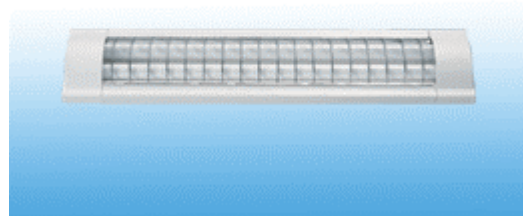

Model	Total Wattage	Length(mm)	Qty(pcs/ctn)	Packing Size(cm)	G.W(kg/ctn)
RI3017N	2X18W	640	12	65.5X43.5X22	16
RI3017N	2X30W	950	12	97X43.5X22	19
RI3017N	2X36W	1250	12	127X43.5X22	29

RI3027

Specification:

Operating Voltage:220-240V/50Hz

Built-in electronic ballast

For T8/G13 Fluorescent lamps

Light-weight aluminium housing with plastic cover

Width:65mm

Height:145mm



Model	Total Wattage	Length(mm)	Qty(pcs/ctn)	Packing Size(cm)	G.W(kg/ctn)
RI3027	2X18W	700	10	72X31X31.5	15
RI3027	2X30W	1006	10	102X31X31.5	18
RI3027	2X36W	1310	10	133X31X31.5	20

RI3037

Specification:

Operating Voltage:220-240V/50Hz

Built-in electronic ballast

For T8/G13 Fluorescent lamps

Light-weight aluminium housing with plastic cover

Width:70mm

Height:155mm



Model	Total Wattage	Length(mm)	Qty(pcs/ctn)	Packing Size(cm)	G.W(kg/ctn)
RI3037	2X18W	635	10	65X33.5X38	14
RI3037	2X30W	940	10	95.5X33.5X38	16
RI3037	2X36W	1245	10	126X33.5X38	18

RI3048

Specification:
 Operationg Voltage:220-240V/50Hz
 Built-in electronic ballast
 For T8/G13 Flurescent lamps
 Light-weight aluminium housing with plastic cover
 Width:65mm
 Height:145mm



Model	Total Wattage	Length(mm)	Qty(pcs/ctn)	Packing Size(cm)	G.W(kg/ctn)
RI3048	2X18W	700	10	71X29.5X35	16
RI3048	2X30W	1006	10	102X29.5X35	19